

MS TERMINAL TABLET

Rugged and Multi-Skill
Much more than a Terminal, Much more than just a Tablet



APOLLO 7

- 7" High Brightness Display
- Vehicle-grade CPU
- IP65 Sealing Level Design
- Supports 250K/500K CANbus (J1939, CANOpen, ISO15765)
- 9-36V Wide Voltage Input, Supports Ignition Detection



Vehicle Grade CPU



IP65



High Brightness
Screen




CANbus



Product Specs

System	Quad-core, 1.5GHz 2G RAM 16G ROM Android 6.0.1/Linux	Display	7", 1024*600p, 750cd/m 5-Points Capacitive Touchscreen
Communication	2.4GHz WiFi, IEEE 802.11 b/g/n, BT4.0, BLE 4G/LTE GNSS (Ublox M8N), Optional Ublox (M8T) Built-in Speaker	I/O Interface	RS-232*2 RS-485*1 CAN*2 (Supports J1939, CANopen, ISO15765) USB 2.0*1 CVBS Camera*2 12V DC OUT*2
Rugged Feature	IP65 Vibration & Shock: MIL-STD-810 Road Vehicle Standard: ISO16750 Humidity 95%, Non-condensing Operation Temperature: -20°C ~+70°C Storage Temperature: -40°C ~+85°C	Power Management	9-36V DC Input Ignition Control Optional External UPS backup battery
Button	Power Key*1, Function Key*2	Mechanical Spec	Dimension (W*H*D): 194*127*29 mm Weight: 0.7 Kg
		Connector Type	Standard Industry Waterproof Connector SMA Female Connector*2 (GPS&4G)

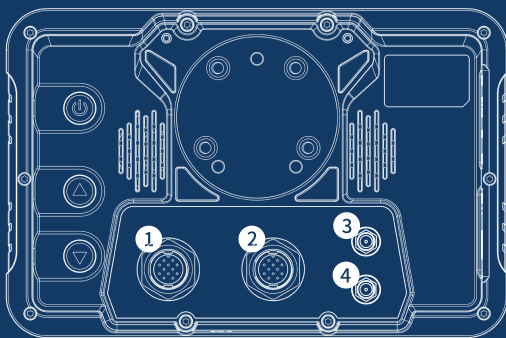

- 1 Power Supply (ACC GND, B+)
RS232*2
CAN*1
12V Power Output*1
- 2 RS485*1
CAN*1
AHD Camera 720p*4/1080p*2
12V Power Output*1
- 3 4G Antenna
- 4 GNSS Antenna



Agriculture



Construction



HMI